


Amp. and Phase vs. time for each freq., 23 segs, 32 APs / seg (32.00 sec / seg.), time ticks 60 sec

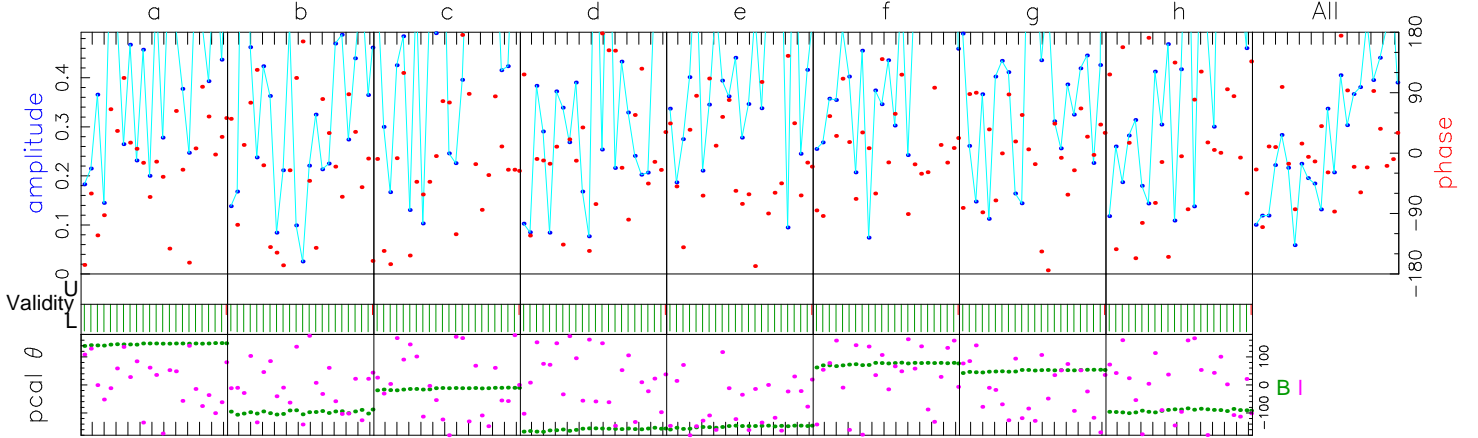

86156.00	86188.00	86220.00	86252.00	86284.00	86316.00	86348.00	86380.00	Freq (MHz)	All
14.5	-8.3	-5.3	-25.5	-8.1	8.1	3.4	4.6	Phase	-0.7
0.2	0.1	0.2	0.1	0.2	0.3	0.2	0.1	Ampl.	0.2
130.2	75.5	131.7	16.6	139.2	131.7	131.7	157.8	Sbd box	131.3
U/L 0/716	0/716	0/716	0/716	0/716	0/716	0/716	0/716	APs used	
B -1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000	PC freqs	
I -1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000	PC freqs	
B:I 0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	PC phase	
B:I 0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	ManI PC	
B 1000	1000	1000	1000	1000	1000	1000	1000	PC amp	
I 1000	1000	1000	1000	1000	1000	1000	1000		
B W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL	Chan ids	
I W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL	Tracks	

Group delay (usec)(sbd)	-2.28532939579E+03	Apriori delay (usec)	-2.28533453410E+03	Resid mbdelay (usec)	5.13831E-03	+/-	2.6E-04
Sband delay (usec)	-2.28531651910E+03	Apriori clock (usec)	3.3812443E+01	Resid sbdelay (usec)	1.80150E-02	+/-	2.0E-03
Phase delay (usec)	-2.28533453412E+03	Apriori clockrate (us/s)	9.999998E-09	Resid phdelay (usec)	-2.23912E-08	+/-	4.3E-07
Delay rate (us/s)	-1.11700200055E+00	Apriori rate (us/s)	-1.11700202377E+00	Resid rate (us/s)	2.32264E-08	+/-	1.1E-09
Total phase (deg)	-276.9	Apriori accel (us/s/s)	2.87555283754E-05	Resid phase (deg)	-0.7	+/-	13.5

ph/seg (deg)	65.0	Theor.	32.3	Amplitude	0.164 +/- 0.019	Pcal mode:	MANUAL, MANUAL	PC period (AP's)	5, 5	
amp/seg (%)	113.7	Search (2048X32)	0.161	Search	0.000	Pcal rate:	0.000E+00, 0.000E+00 (us/s)	sb window (us)	-1.000 1.000	
ph/frq (deg)	13.5	Interp.	0.000	Inc. seg. avg.	0.247	Bits/sample:	2x2	SampCntNorm: enabled	mb window (us)	-0.016 0.016
amp/frq (%)	30.0	Inc. frq. avg.	0.158	Inc. frq. avg.	0.158	Sample rate (MSamp/s):	64	ion window (TEC)	0.00 0.00	