


Amp. and Phase vs. time for each freq., 23 segs, 32 APs / seg (32.00 sec / seg.), time ticks 60 sec

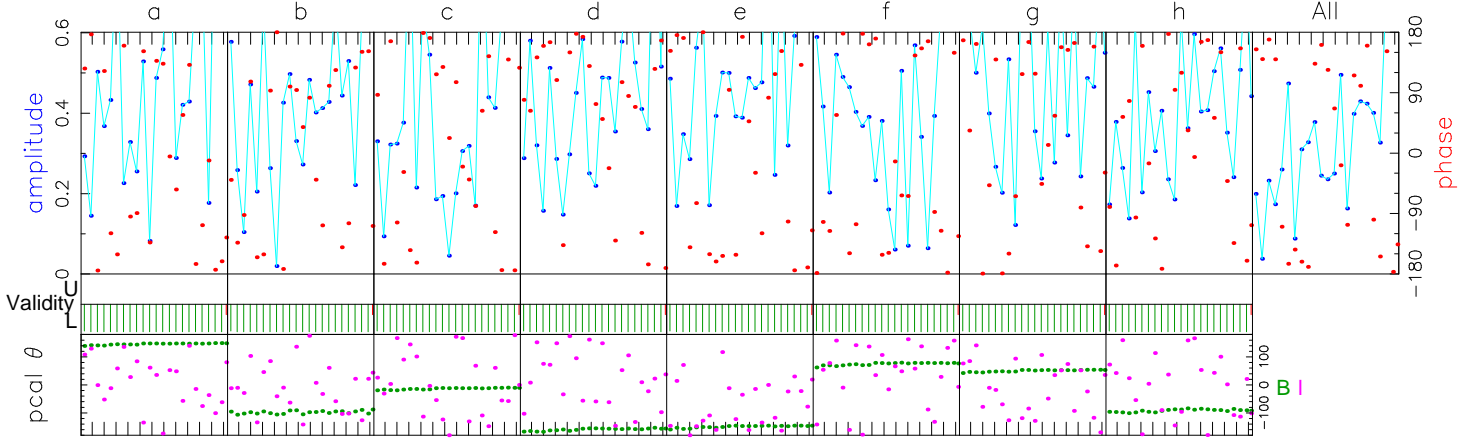

	86156.00	86188.00	86220.00	86252.00	86284.00	86316.00	86348.00	86380.00	Freq (MHz)	All
UL	0/716	0/716	0/716	0/716	0/716	0/716	0/716	0/716		
B	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000		
I	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000		
B:l	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0		
B:l	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0		
B	1000	1000	1000	1000	1000	1000	1000	1000		
I	1000	1000	1000	1000	1000	1000	1000	1000		
B	W00LR	W01LR	W02LR	W03LR	W04LR	W05LR	W06LR	W07LR		
I	W00LR	W01LR	W02LR	W03LR	W04LR	W05LR	W06LR	W07LR		

Group delay (usec)(sbd)	-2.28535761104E+03	Apriori delay (usec)	-2.28533453410E+03	Resid mbdelay (usec)	8.17306E-03	+/-	2.1E-04
Sband delay (usec)	-2.28535940660E+03	Apriori clock (usec)	3.3812443E+01	Resid sbdelay (usec)	-2.48725E-02	+/-	1.7E-03
Phase delay (usec)	-2.28533452858E+03	Apriori clockrate (us/s)	9.999998E-09	Resid phdelay (usec)	5.52203E-06	+/-	3.6E-07
Delay rate (us/s)	-1.11700200235E+00	Apriori rate (us/s)	-1.11700202377E+00	Resid rate (us/s)	2.14230E-08	+/-	8.6E-10
Total phase (deg)	75.0	Apriori accel (us/s/s)	2.87555283754E-05	Resid phase (deg)	351.2	+/-	11.1

ph/seg (deg)	60.6	Theor.	26.5	Amplitude	0.201 +/- 0.019	Pcal mode:	MANUAL, MANUAL	PC period (AP's)	5, 5
amp/seg (%)	109.5	Search (2048X32)	0.195	Search	0.000	Pcal rate:	0.000E+00, 0.000E+00 (us/s)	sb window (us)	-1.000 1.000
ph/frq (deg)	21.8	Interp.	0.000	Inc. seg. avg.	0.304	Bits/sample:	2x2	SampCntNorm:	enabled
amp/frq (%)	27.3	Inc. frq. avg.	0.205	Inc. frq. avg.	0.205	Sample rate (MSamp/s):	64	mb window (us)	-0.016 0.016
						Data rate (Mb/s):	1024	dr window (ns/s)	-0.006 0.006
						nlags:	128	ion window (TEC)	0.00 0.00