
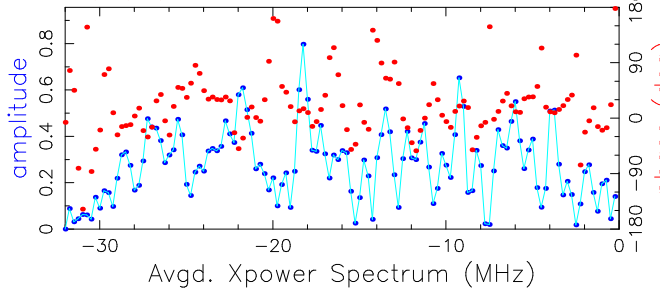



Fringe quality 9

SNR 11.6
Int time 599.981
Amp 0.245
Phase -271.6
PFD 9.8e-23
Delays (us)
SBD 0.017051
MBD -0.001430
Fringe rate (Hz)
-0.011280
Ion TEC 0.000
Ref freq (MHz)
86140.0000
AP (sec) 1.000

Exp. c172b
Exper # 16383
Yr:day 2017:272
Start 210000.00
Stop 211000.00
FRT 210500.00
Corr/FF/build
2018:047:110751
2018:051:192101
2017:188:152524
RA & Dec (J2000)
15h04m24.9798s
+10°29'39.199"

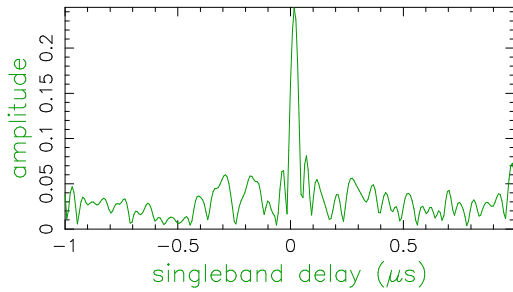

Amp. and Phase vs. time for each freq., 23 segs, 27 APs / seg (27.00 sec / seg.), time ticks 30 sec

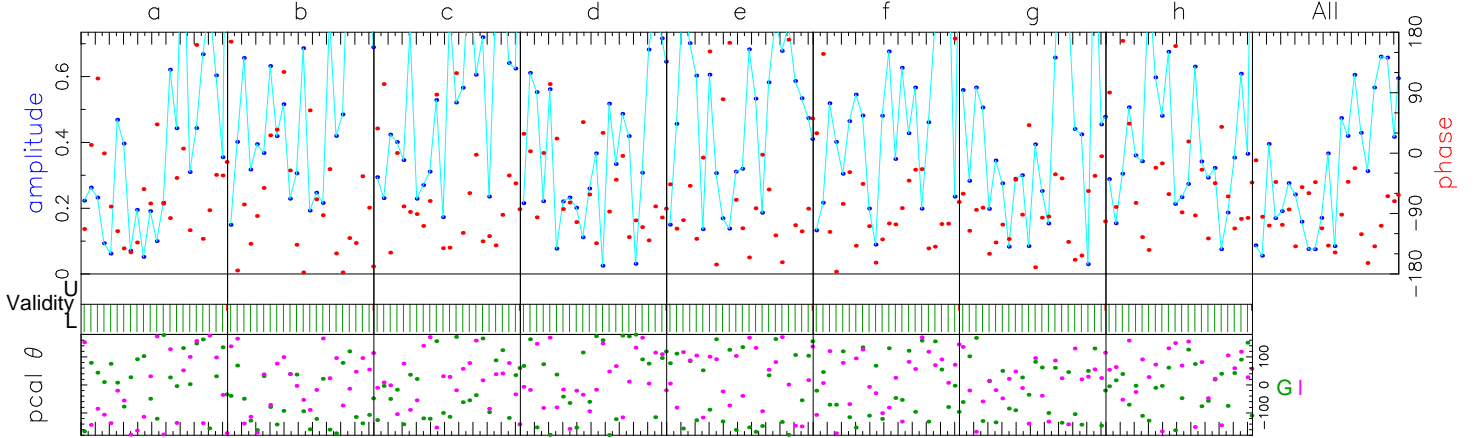

	86156.00	86188.00	86220.00	86252.00	86284.00	86316.00	86348.00	86380.00	Freq (MHz)	All
U/L	0/600	0/600	0/600	0/600	0/600	0/600	0/600	0/600		
G	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000		
I	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000		
G:I	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0		
G:I	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0		
G	1000	1000	1000	1000	1000	1000	1000	1000		
I	1000	1000	1000	1000	1000	1000	1000	1000		
G	W00LR	W01LR	W02LR	W03LR	W04LR	W05LR	W06LR	W07LR		
I	W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL		
Group delay (usec)(sbd)	-1.19213330510E+03	-1.19214607449E+03	-1.19216312844E+03	-1.19217999793E+03	-1.19219691742E+03	-1.19221383691E+03	-1.19223075640E+03	-1.19224767589E+03		
Sband delay (usec)	-1.19214607449E+03	-1.19216312844E+03	-1.19217999793E+03	-1.19219691742E+03	-1.19221383691E+03	-1.19223075640E+03	-1.19224767589E+03	-1.19226459538E+03		
Phase delay (usec)	-1.19216312844E+03	-1.19217999793E+03	-1.19219691742E+03	-1.19221383691E+03	-1.19223075640E+03	-1.19224767589E+03	-1.19226459538E+03	-1.19228151487E+03		
Delay rate (us/s)	-5.49609719115E-01	-5.49609719115E-01	-5.49609719115E-01	-5.49609719115E-01	-5.49609719115E-01	-5.49609719115E-01	-5.49609719115E-01	-5.49609719115E-01		
Total phase (deg)			-498.3							
Apriori delay (usec)										
Apriori clock (usec)										
Apriori clockrate (us/s)										
Apriori rate (us/s)										
Apriori accel (us/s/s)										
Resid mbdelay (usec)										
Resid sbdelay (usec)										
Resid phdelay (usec)										
Resid rate (us/s)										
Resid phase (deg)										
Pcal mode: MANUAL, MANUAL										
Pcal rate: 0.000E+00, 0.000E+00 (us/s)										
Bits/sample: 2x2										
Sample rate(MSamp/s): 64										
Data rate(Mb/s): 1024										
nlags: 128 t_cohere infinite										
sb window (us)	-1.000	1.000								
mb window (us)	-0.016	0.016								
dr window (ns/s)	-0.006	0.006								
ion window (TEC)	0.00	0.00								
simultaneous interpolator										