


Amp. and Phase vs. time for each freq., 23 segs, 27 APs / seg (27.00 sec / seg.), time ticks 30 sec

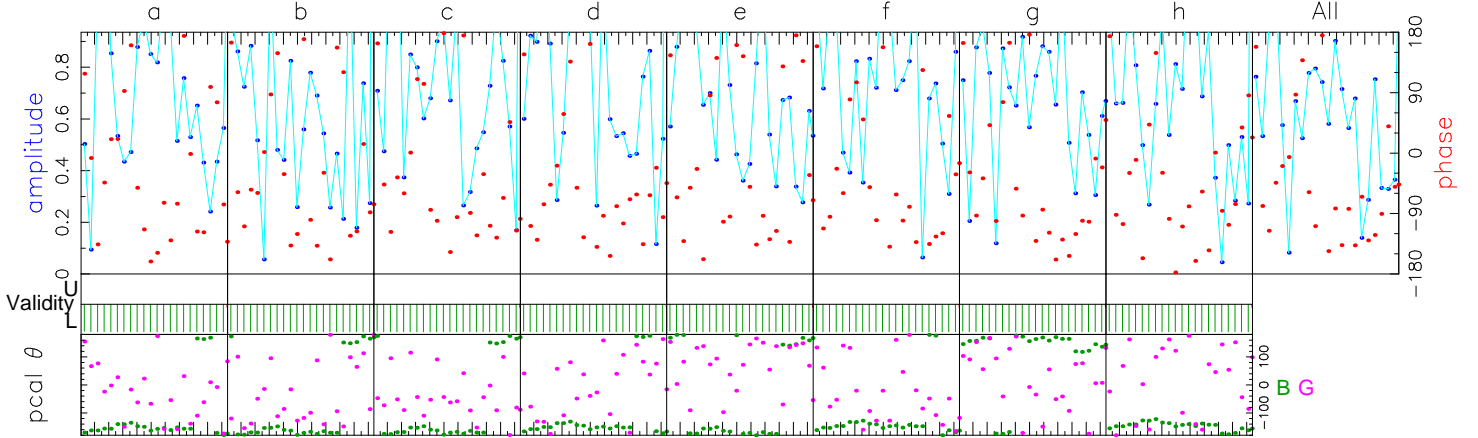

| | 86156.00 | 86188.00 | 86220.00 | 86252.00 | 86284.00 | 86316.00 | 86348.00 | 86380.00 | Freq (MHz) | All |
|-------------------------|--------------------|----------|--------------------------|----------|--------------------|----------|----------------------|----------|--------------|-------------|
| | -100.8 | -113.9 | -98.2 | -101.4 | -115.2 | -107.5 | -107.1 | -97.0 | Phase | -104.8 |
| | 0.3 | 0.2 | 0.3 | 0.4 | 0.3 | 0.3 | 0.3 | 0.3 | Ampl. | 0.3 |
| | 127.5 | 128.0 | 127.7 | 128.0 | 128.7 | 128.6 | 128.1 | 128.9 | Sbd box | 128.2 |
| U/L | 0/597 | 0/597 | 0/597 | 0/597 | 0/597 | 0/597 | 0/597 | 0/597 | APs used | |
| B | -1000 | -1000 | -1000 | -1000 | -1000 | -1000 | -1000 | -1000 | PC freqs | |
| G | -1000 | -1000 | -1000 | -1000 | -1000 | -1000 | -1000 | -1000 | PC freqs | |
| B:G | 0:0 | 0:0 | 0:0 | 0:0 | 0:0 | 0:0 | 0:0 | 0:0 | PC phase | |
| B:G | 0:0 | 0:0 | 0:0 | 0:0 | 0:0 | 0:0 | 0:0 | 0:0 | Manl PC | |
| B | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | PC amp | |
| G | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | | |
| B | W00LR | W01LR | W02LR | W03LR | W04LR | W05LR | W06LR | W07LR | Chan ids | |
| G | W00LL | W01LL | W02LL | W03LL | W04LL | W05LL | W06LL | W07LL | Tracks | |
| | | | | | | | | | Chan ids | |
| | | | | | | | | | Tracks | |
| Group delay (usec)(sbd) | 2.43904526883E+03 | | Apriori delay (usec) | | 2.43903723236E+03 | | Resid mbdelay (usec) | | 8.03648E-03 | +/- 1.5E-04 |
| Sband delay (usec) | 2.43903062186E+03 | | Apriori clock (usec) | | 4.0021774E+01 | | Resid sbdelay (usec) | | -6.61050E-03 | +/- 1.2E-03 |
| Phase delay (usec) | 2.43903722898E+03 | | Apriori clockrate (us/s) | | -2.3900001E-07 | | Resid phdelay (usec) | | -3.37964E-06 | +/- 2.5E-07 |
| Delay rate (us/s) | -1.12531728506E+00 | | Apriori rate (us/s) | | -1.12531740961E+00 | | Resid rate (us/s) | | 1.24549E-07 | +/- 7.3E-10 |
| Total phase (deg) | | | Apriori accel (us/s/s) | | -1.32156633883E-06 | | Resid phase (deg) | | -104.8 | +/- 7.8 |

| | RMS | Theor. | Amplitude | 0.312 +/- 0.021 | Pcal mode: MANUAL, MANUAL | PC period (AP's) 5, 5 | sb window (us) | -1.000 | 1.000 |
|--------------|-------|--------|------------------|-----------------|--|------------------------------|------------------|--------|-------|
| ph/seg (deg) | 71.6 | 18.7 | Search (2048X32) | 0.309 | Pcal rate: 0.000E+00, 0.000E+00 (us/s) | | | | |
| amp/seg (%) | 125.4 | 32.6 | Interp. | 0.000 | Bits/sample: 2x2 | SampCntNorm: enabled | mb window (us) | -0.016 | 0.016 |
| ph/frq (deg) | 7.5 | 11.0 | Inc. seg. avg. | 0.573 | Sample rate(MSamp/s): 64 | | dr window (ns/s) | -0.006 | 0.006 |
| amp/frq (%) | 17.0 | 19.2 | Inc. frq. avg. | 0.308 | Data rate(Mb/s): 1024 | nlags: 128 t_cohere infinite | ion window (TEC) | 0.00 | 0.00 |