


Amp. and Phase vs. time for each freq., 23 segs, 27 APs / seg (27.00 sec / seg.), time ticks 30 sec

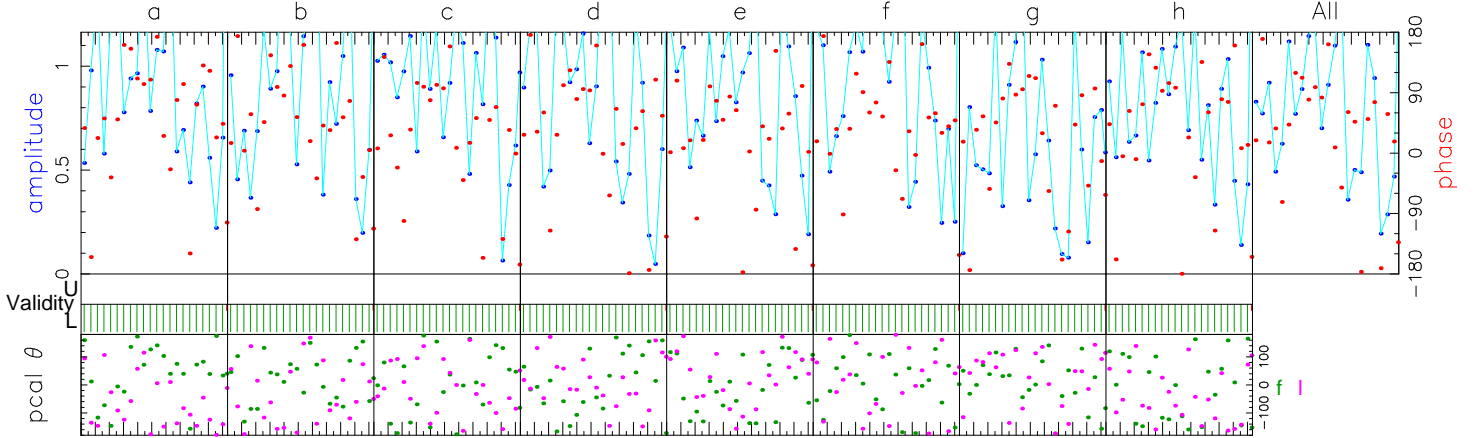

	86156.00	86188.00	86220.00	86252.00	86284.00	86316.00	86348.00	86380.00	Freq (MHz)	All
U/L	0/600	0/600	0/600	0/600	0/600	0/600	0/600	0/600		
f	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000		
l	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000		
f:l	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0		
f:l	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0		
f	1000	1000	1000	1000	1000	1000	1000	1000		
l	1000	1000	1000	1000	1000	1000	1000	1000		
f	W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL		
l	W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL		
Group delay (usec)(sbd)		1.44527589538E+03			1.44526732677E+03			8.56861E-03		+/- 1.2E-04
Sband delay (usec)		1.44527798177E+03			6.5839167E+00			1.06550E-02		+/- 9.4E-04
Phase delay (usec)		1.44526732877E+03			-2.1700000E-07			2.00724E-06		+/- 2.0E-07
Delay rate (us/s)		-2.80380012298E-02			-2.80380989406E-02			9.77108E-08		+/- 5.8E-10
Total phase (deg)			252.2		-6.30260033648E-06			62.2		+/- 6.2
Apriori delay (usec)										
Apriori clock (usec)										
Apriori clockrate (us/s)										
Apriori rate (us/s)										
Apriori accel (us/s/s)										
Resid mbdelay (usec)										
Resid sbdelay (usec)										
Resid phdelay (usec)										
Resid rate (us/s)										
Resid phase (deg)										
Pcal mode: MANUAL, MANUAL										
Pcal rate: 0.000E+00, 0.000E+00 (us/s)										
PC period (AP's) 5, 5										
sb window (us)										-1.000 1.000
Bits/sample: 2x2										-0.016 0.016
SampCntNorm: enabled										-0.006 0.006
Sample rate(MSamp/s): 64										0.00 0.00
Data rate(Mb/s): 1024										
nlags: 128 t_cohere infinite										
ion window (TEC)										

ph/seg (deg) 69.6 15.0 Search (2048X32) 0.379 Pcal mode: MANUAL, MANUAL PC period (AP's) 5, 5

amp/seg (%) 131.5 26.1 Interp. 0.000 Bits/sample: 2x2 SampCntNorm: enabled sb window (us) -1.000 1.000

ph/frq (deg) 12.6 8.8 Inc. seg. avg. 0.761 Sample rate(MSamp/s): 64 Data rate(Mb/s): 1024 nlags: 128 t\_cohere infinite dr window (ns/s) -0.006 0.006

amp/frq (%) 6.7 15.4 Inc. frq. avg. 0.387 Data rate(Mb/s): 1024 nlags: 128 t\_cohere infinite ion window (TEC) 0.00 0.00

f: az 155.5 el 47.1 pa -20.1 l: az 154.6 el 41.6 pa -19.4 u,v (fr/asec) 150.928 -576.101 simultaneous interpolator

Control file: cf\_1234 Input file: /Exps/c172c/v3\_v1\_merge/1234/No0452/fl..00TLYG Output file: /Exps/c172c/v3\_v1\_merge/1234/No0452/fl.W.41.00TLYG