


Amp. and Phase vs. time for each freq., 23 segs, 27 APs / seg (27.00 sec / seg.), time ticks 30 sec

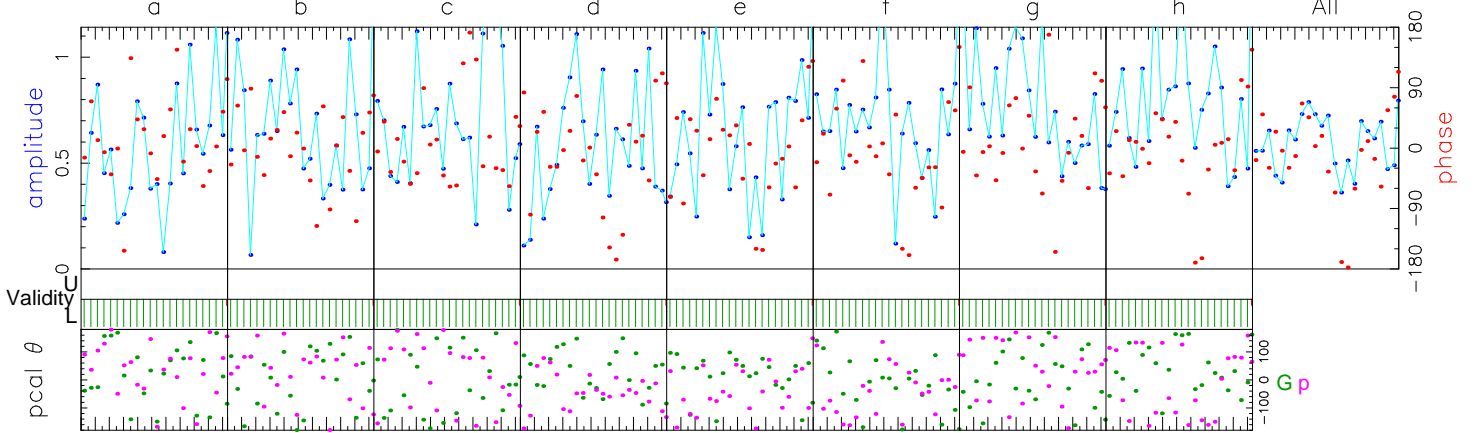

	86156.00	86188.00	86220.00	86252.00	86284.00	86316.00	86348.00	86380.00	Freq (MHz)	All
U/L	0/600	0/600	0/600	0/600	0/600	0/600	0/600	0/600		
G	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000		
p	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000		
G:p	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0		
G:p	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0		
G	1000	1000	1000	1000	1000	1000	1000	1000		
p	1000	1000	1000	1000	1000	1000	1000	1000		
G	W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL		
p	W00LR	W01LR	W02LR	W03LR	W04LR	W05LR	W06LR	W07LR		

Group delay (usec)(sbd)	6.51142988489E+02	Apriori delay (usec)	6.51107508454E+02	Resid mbdelay (usec)	4.23003E-03	+/-	1.2E-04
Sband delay (usec)	6.51128247454E+02	Apriori clock (usec)	-1.4408208E+01	Resid sbdelay (usec)	2.07390E-02	+/-	9.6E-04
Phase delay (usec)	6.51107508495E+02	Apriori clockrate (us/s)	-1.1500000E-07	Resid phdelay (usec)	4.05984E-08	+/-	2.0E-07
Delay rate (us/s)	-4.53648418003E-01	Apriori rate (us/s)	-4.53648331480E-01	Resid rate (us/s)	-8.65227E-08	+/-	5.9E-10
Total phase (deg)	101.4	Apriori accel (us/s/s)	8.63498986355E-07	Resid phase (deg)	-178.7	+/-	6.4

ph/seg (deg)	66.4	RMS	15.2	Theor.	15.2	Amplitude	0.381 +/- 0.021	Pcal mode:	MANUAL, MANUAL	PC period (AP's)	5, 5		
amp/seg (%)	63.7	Search (2048X32)	0.367	Interp.	0.000	Apriori clock (usec)	0.367	Pcal rate:	0.000E+00, 0.000E+00 (us/s)	sb window (us)	-1.000 1.000		
ph/frq (deg)	9.2	Inc. seg. avg.	0.570	Inc. frq. avg.	0.377	Apriori clockrate (us/s)	-1.1500000E-07	Bits/sample:	2x2	SampCntNorm:	enabled	mb window (us)	-0.016 0.016
amp/frq (%)	19.1	Inc. frq. avg.	0.377	u,v (fr/asec)	3518.004 385.493	Apriori rate (us/s)	-4.53648331480E-01	Sample rate(MSamp/s):	64	ion window (TEC)	0.00 0.00		