


Fringe quality 4  
 SNR 134.8  
 Int time 596.435  
 Amp 2.856  
 Phase -278.4  
 PFD 0.0e+00  
 Delays (us)  
 SBD 0.044721  
 MBD 0.014114  
 Fringe rate (Hz) 0.005077  
 Ion TEC 0.000  
 Ref freq (MHz) 86140.0000  
 AP (sec) 1.000  
 Exp. c172c  
 Exper # 16383  
 Yr:day 2017:274  
 Start 014003.00  
 Stop 015000.00  
 FRT 014500.00  
 Corr/FF/build  
 2018:021:024507  
 2018:074:030939  
 2018:058:134248  
 RA & Dec (J2000)  
 22h32m36.4089s  
 +11°43'50.904"

Amp. and Phase vs. time for each freq., 23 segs, 27 APs / seg (27.00 sec / seg.), time ticks 30 sec

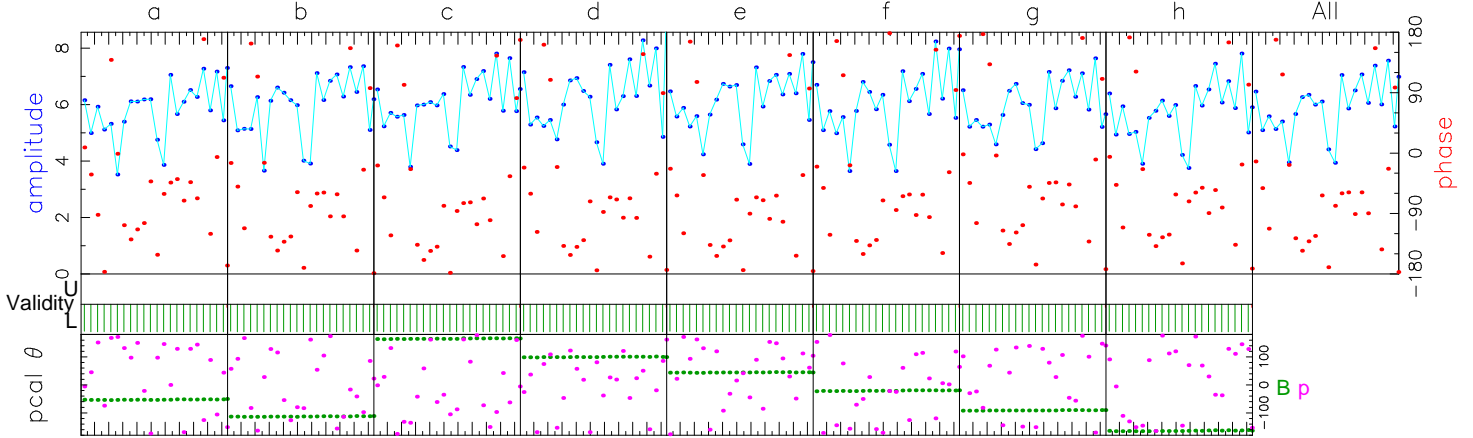

	86156.00	86188.00	86220.00	86252.00	86284.00	86316.00	86348.00	86380.00	Freq (MHz)	All
U/L	0/597	0/597	0/597	0/597	0/597	0/597	0/597	0/597	134.7	134.7
B	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000
p	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000	-1000
B:p	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0
B:p	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0
B	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
p	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
B	W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL		
p	W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL		
Group delay (usec)(sbd)	-4.42475570164E+03	-4.42475634520E+03	-4.42480106887E+03	-4.42480164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00
Sband delay (usec)	-4.42475570164E+03	-4.42475634520E+03	-4.42480106887E+03	-4.42480164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00
Phase delay (usec)	-4.42480106887E+03	-4.42480164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00
Delay rate (us/s)	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00	-1.84080164392E+00
Total phase (deg)			-206.1							
Apriori delay (usec)										
Apriori clock (usec)										
Apriori clockrate (us/s)										
Apriori rate (us/s)										
Apriori accel (us/s/s)										
Resid mbdelay (usec)										
Resid sbdelay (usec)										
Resid phdelay (usec)										
Resid rate (us/s)										
Resid phase (deg)										
Pcal mode: MANUAL, MANUAL										
Pcal rate: 0.000E+00, 0.000E+00 (us/s)										
PC period (AP's) 5, 5										
sb window (us)										
mb window (us)										
dr window (ns/s)										
ion window (TEC)										
nlags: 128 t_cohere infinite										

ph/seg (deg) 70.0 2.0  
 amp/seg (%) 111.0 3.6  
 ph/frq (deg) 11.9 1.2  
 amp/frq (%) 3.2 2.1

Search (2048X32) 2.747  
 Interp. 0.000  
 Inc. seg. avg. 5.869  
 Inc. frq. avg. 2.883

u,v (fr/asec) 10819.856 2220.243

simultaneous interpolator

Control file: cf\_1234 Input file: /Exps/c172c/v3\_v1\_merge/1234/No0243/Bp..00TKK6 Output file: /Exps/c172c/v3\_v1\_merge/1234/No0243/Bp.W.253.00TKK6