


Amp. and Phase vs. time for each freq., 23 segs, 26 APs / seg (13.00 sec / seg.), time ticks 10 sec

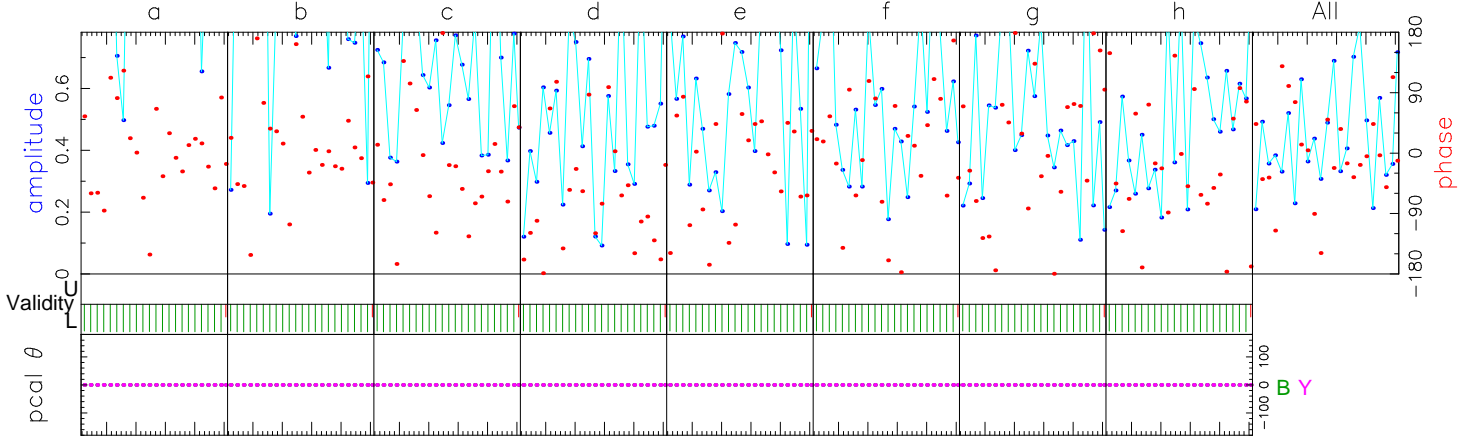

	86156.00	86188.00	86220.00	86252.00	86284.00	86316.00	86348.00	86380.00	Freq (MHz)	All
	1.2	-4.7	-20.8	-82.4	1.6	43.3	-13.4	-42.8	Phase	-5.3
	0.7	0.6	0.2	0.2	0.2	0.2	0.1	0.1	Ampl.	0.3
	133.4	133.5	143.1	160.5	115.4	132.5	205.6	118.7	Sbd box	133.5
U/L	0/584	0/584	0/584	0/584	0/584	0/584	0/584	0/584	APs used	
B	0	0	0	0	0	0	0	0	PC freqs	
Y	0	0	0	0	0	0	0	0	PC freqs	
B:Y	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	PC phase	
B:Y	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	Manl PC	
B	1000	1000	1000	1000	1000	1000	1000	1000	PC amp	
Y	1000	1000	1000	1000	1000	1000	1000	1000		
B	W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL	Chan ids	
Y	W00LR	W01LR	W02LR	W03LR	W04LR	W05LR	W06LR	W07LR	Tracks	
									Chan ids	
									Tracks	
Group delay (usec)(sbd)		-2.45583047054E+03		Apriori delay (usec)		-2.45586782097E+03		Resid mbdelay (usec)		6.10043E-03 +/- 2.5E-04
Sband delay (usec)		-2.45583262897E+03		Apriori clock (usec)		1.8728495E+01		Resid sbdelay (usec)		3.51920E-02 +/- 2.0E-03
Phase delay (usec)		-2.45586782114E+03		Apriori clockrate (us/s)		-4.7999999E-07		Resid phdelay (usec)		-1.71605E-07 +/- 4.3E-07
Delay rate (us/s)		6.15123597785E-02		Apriori rate (us/s)		6.15121172932E-02		Resid rate (us/s)		2.42485E-07 +/- 2.5E-09
Total phase (deg)		-220.8		Apriori accel (us/s/s)		1.78827921453E-05		Resid phase (deg)		-185.3 +/- 13.3

ph/seg (deg) 68.4 32.0 Amplitude 0.261 +/- 0.030 Pcal mode: MANUAL, MANUAL PC period (AP's) 5, 5  
 amp/seg (%) 94.1 55.8 Search (2048X32) 0.251 Pcal rate: 0.000E+00, 0.000E+00 (us/s) sb window (us) -1.000 1.000  
 ph/frq (deg) 41.0 18.9 Interp. 0.000 Bits/sample: 2x2 SampCntNorm: enabled mb window (us) -0.016 0.016  
 amp/frq (%) 78.8 32.9 Inc. seg. avg. 0.384 Sample rate(MSamp/s): 64 Data rate(Mb/s): 1024 nlags: 128 t\_cohere infinite dr window (ns/s) -0.012 0.012  
 B: az 262.1 el 32.6 pa 42.1 Y: az 261.7 el 41.0 pa 53.3 u,v (fr/asec) -354.148 1530.894 simultaneous interpolator  
 Control file: cf\_1234\_gmva Input file: /Exps/f182a/FRINGE/1234/No0002/BY..0AYLPO Output file: /Exps/f182a/FRINGE/1234/No0002/BY.W.15.0AYLPO