


Amp. and Phase vs. time for each freq., 23 segs, 27 APs / seg (13.50 sec / seg.), time ticks 10 sec

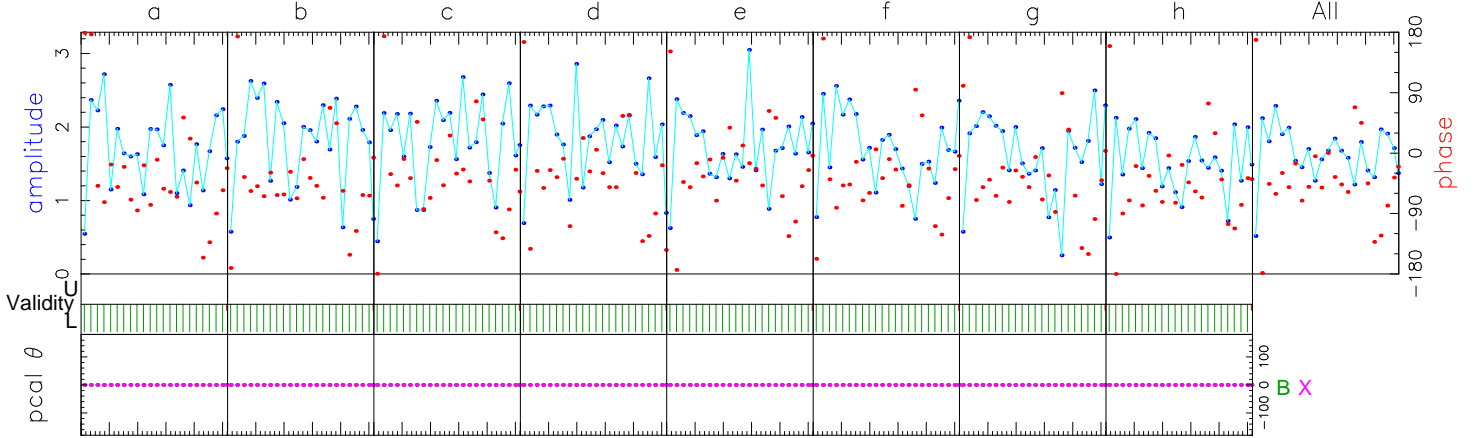

	86156.00	86188.00	86220.00	86252.00	86284.00	86316.00	86348.00	86380.00	Freq (MHz)	All
	-60.5	-55.4	-34.3	-39.2	-35.2	-49.5	-57.9	-55.2	Phase	-48.4
	1.2	1.2	1.1	1.2	1.1	1.1	1.0	1.0	Ampl.	1.1
	133.8	133.8	133.6	133.8	133.4	133.3	133.6	133.8	Sbd box	133.6
U/L	0/600	0/600	0/600	0/600	0/600	0/600	0/600	0/600	APs used	
B	0	0	0	0	0	0	0	0	PC freqs	
X	0	0	0	0	0	0	0	0	PC freqs	
B:X	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	PC phase	
B:X	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	Manl PC	
B	1000	1000	1000	1000	1000	1000	1000	1000	PC amp	
X	1000	1000	1000	1000	1000	1000	1000	1000		
B	W00LL	W01LL	W02LL	W03LL	W04LL	W05LL	W06LL	W07LL	Chan ids	
X	W00LR	W01LR	W02LR	W03LR	W04LR	W05LR	W06LR	W07LR	Tracks	
									Chan ids	
									Tracks	
Group delay (usec)(sbd)		1.46574059959E+02		Apriori delay (usec)		1.46537634167E+02		Resid mbdelay (usec)	5.17579E-03	+/- 5.9E-05
Sband delay (usec)		1.46573628167E+02		Apriori clock (usec)		4.6403236E+00		Resid sbdelay (usec)	3.59940E-02	+/- 4.7E-04
Phase delay (usec)		1.46537632606E+02		Apriori clockrate (us/s)		-5.69999999E-07		Resid phdelay (usec)	-1.56148E-06	+/- 1.0E-07
Delay rate (us/s)		1.09182379208E-01		Apriori rate (us/s)		1.09182397691E-01		Resid rate (us/s)	-1.84830E-08	+/- 5.8E-10
Total phase (deg)			62.2	Apriori accel (us/s/s)		-5.67334955398E-06		Resid phase (deg)	-228.4	+/- 3.1
RMS		Theor.	Amplitude	1.097 +/- 0.030						
ph/seg (deg)	60.0	7.5	Search (2048X32)	1.053	Pcal mode: MANUAL, MANUAL	PC period (AP's) 5, 5		sb window (us)	-1.000	1.000
amp/seg (%)	60.0	13.1	Interp.	0.000	Pcal rate: 0.000E+00, 0.000E+00 (us/s)	SampCntNorm: enabled		mb window (us)	-0.016	0.016
ph/frq (deg)	11.5	4.4	Inc. seg. avg.	1.632	Bits/sample: 2x2	Sample rate(MSamp/s): 64		dr window (ns/s)	-0.012	0.012
amp/frq (%)	6.0	7.7	Inc. frq. avg.	1.095	Data rate(Mb/s): 1024	nlags: 128 t_cohere infinite		ion window (TEC)	0.00	0.00