


Amp. and Phase vs. time for each freq., 70 segs, 12 APs / seg (6.00 sec / seg.), time ticks 10 sec

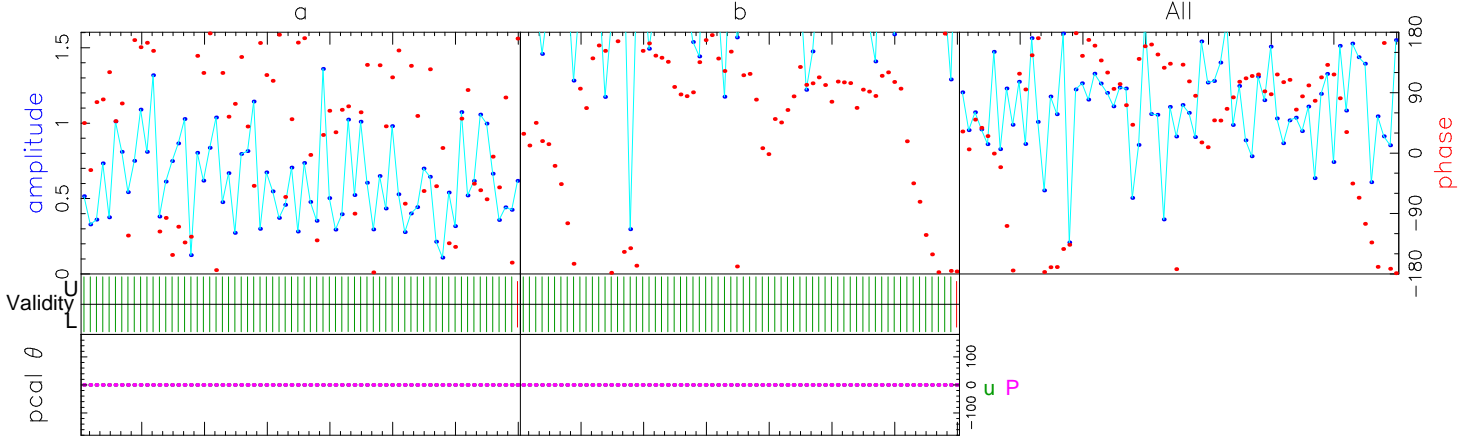

86156.00	86220.00	Freq (MHz)	All				
117.7	113.8	Phase	114.3				
0.1	0.9	Ampl.	0.5				
251.8	129.3	Sbd box	128.9				
U/L 838/838	838/838	APs used					
u 0	0	PC freqs					
P -1000	-1000	PC freqs					
u:P 0:0	0:0	PC phase					
u:P 0:0	0:0	Mani PC					
u 1000	1000	PC amp					
P 1000	1000						
u W00UR,W00LR	W01UR,W01LR	Chan ids					
P W00UR,W00LR	W02UR,W02LR	Tracks					
		Chan ids					
		Tracks					
Group delay (usec)(sbd)	-7.06140581439E+03	Apriori delay (usec)	-7.06140497920E+03	Resid mbdelay (usec)	-8.35192E-04	+/-	3.3E-04
Sband delay (usec)	-7.06140598770E+03	Apriori clock (usec)	-2.6035910E+00	Resid sbdelay (usec)	-1.00850E-03	+/-	5.8E-04
Phase delay (usec)	-7.06140497551E+03	Apriori clockrate (us/s)	-1.3700000E-07	Resid phdelay (usec)	3.68730E-06	+/-	1.2E-07
Delay rate (us/s)	-5.53681129234E-01	Apriori rate (us/s)	-5.53681217478E-01	Resid rate (us/s)	8.82437E-08	+/-	1.0E-09
Total phase (deg)	-212.7	Apriori accel (us/s/s)	3.52224293253E-05	Resid phase (deg)	114.3	+/-	3.8

ph/seg (deg)	67.8	Theor.	32.1	Amplitude	0.534 +/- 0.036	Pcal mode:	MANUAL, MANUAL	PC period (AP's)	5, 5
amp/seg (%)	120.3	Search (2048X8)	0.528	Interp.	0.000	Pcal rate:	0.000E+00, 0.000E+00 (us/s)	sb window (us)	-1.000 1.000
ph/frq (deg)	0.0	Inc. seg. avg.	0.955	Inc. frq. avg.	0.530	Bits/sample:	2x2	SampCntNorm:	enabled
amp/frq (%)	73.4	Inc. frq. avg.	0.530			Sample rate(MSamp/s):	64	mb window (us)	-0.008 0.008
						Data rate(Mb/s):	512	dr window (ns/s)	-0.012 0.012
						nlags:	128	t_cohere	infinite
								ion window (TEC)	0.00 0.00

u: az 339.5 el 28.5 pa 62.2      P: az 13.6 el 53.2 pa -146.8      u,v (fr/asec) 10023.501 7980.701      simultaneous interpolator

Control file: cf\_1234\_gmva    Input file: /Exps/c181e/v2/1234/No0077/uP..09MD8I    Output file: /Exps/c181e/v2/1234/No0077/uP.W.62.09MD8I