


Amp. and Phase vs. time for each freq., 69 segs, 12 APs / seg (6.14 sec / seg.), time ticks 10 sec

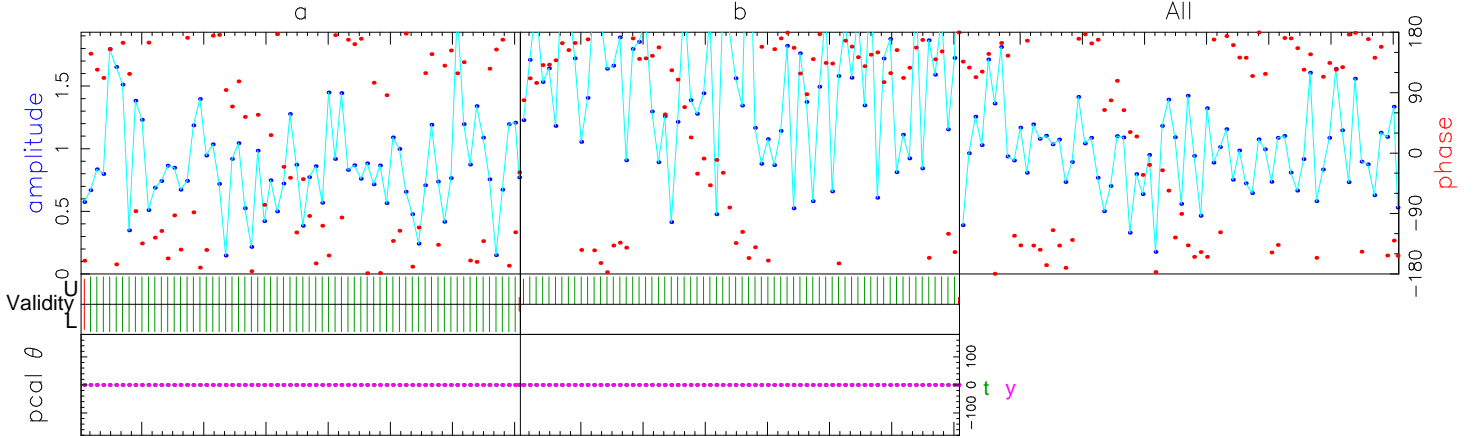

86156.00		86220.00		Freq (MHz)		All
-171.8		160.8		Phase		174.9
0.5		0.9		Ampl.		0.6
128.1		128.9		Sbd box		128.4
U/L 819/819		819/0		APs used		
t 0		0		PC freqs		
y 0		0		PC freqs		
t:y 0:0		0:0		PC phase		
ty 0:0		0:0		Manl PC		
t 1000		1000		PC amp		
y 1000		1000				
t W00UL,W00LL		W01UL		Chan ids		
y W00UL,W00LL		W01UL		Tracks		
				Chan ids		
				Tracks		
Group delay (usec)(sbd)	-2.31171535265E+02	Apriori delay (usec)	-2.31173695716E+02	Resid mbdelay (usec)	2.16045E-03	+/- 3.2E-04
Sband delay (usec)	-2.31178458216E+02	Apriori clock (usec)	-7.6908474E+00	Resid sbdelay (usec)	-4.76250E-03	+/- 6.6E-04
Phase delay (usec)	-2.31173690077E+02	Apriori clockrate (us/s)	1.4440001E-07	Resid phdelay (usec)	5.63865E-06	+/- 1.4E-07
Delay rate (us/s)	-3.55909426364E-02	Apriori rate (us/s)	-3.55909328605E-02	Resid rate (us/s)	-9.77597E-09	+/- 9.8E-10
Total phase (deg)	121.2	Apriori accel (us/s/s)	-2.95808347347E-06	Resid phase (deg)	174.9	+/- 4.2

ph/seg (deg)	62.5	Theor.	30.5	Amplitude	0.643 +/- 0.041	Pcal mode: MANUAL, MANUAL	PC period (AP's) 5, 5			
amp/seg (%)	73.1	Search (2048X8)	0.620	Search	0.000	Pcal rate: 0.000E+00, 0.000E+00 (us/s)	sb window (us)	-1.000	1.000	
ph/frq (deg)	0.0	Interp.	0.000	Inc. seg. avg.	0.864	Bits/sample: 2x2	SampCntNorm: enabled	mb window (us)	-0.008	0.008
amp/frq (%)	34.3	Inc. frq. avg.	0.621	Inc. frq. avg.	0.621	Sample rate(MSamp/s): 64	ion window (TEC)	-0.011	0.011	
t: az 290.1 el 50.2 pa 80.8		y: az 285.2 el 51.1 pa 73.6		u,v (fr/asec)	249.950 -608.051	Data rate(Mb/s): 384	nlags: 128	t_cohere	infinite	simultaneous interpolator
Control file: cf_1234_gmva		Input file: /Exps/c181d/v2_pc1/1234/No0041/ty..0D45BS		Output file: /Exps/c181d/v2_pc1/1234/No0041/ty.W.13.0D45BS						