


Amp. and Phase vs. time for each freq., 69 segs, 12 APs / seg (6.14 sec / seg.), time ticks 10 sec

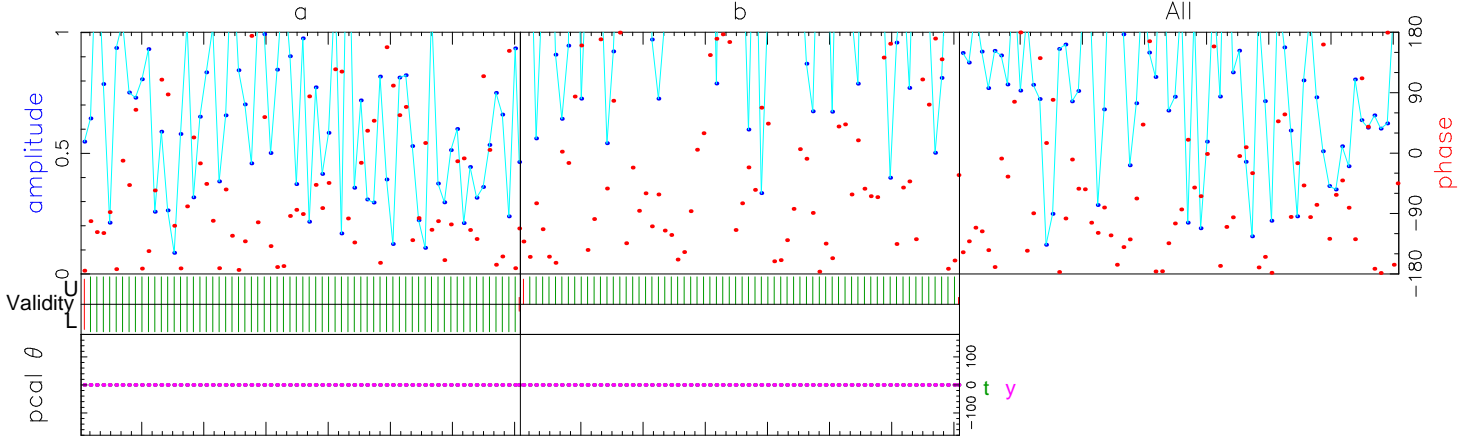

86156.00		86220.00		Freq (MHz)	All
-118.7		-121.4		Phase	-120.0
0.3		0.5		Ampl.	0.3
128.9		129.3		Sbd box	129.2
U/L 819/819		819/0		APs used	
t 0		0		PC freqs	
y 0		0		PC freqs	
t:y 0:0		0:0		PC phase	
ty 0:0		0:0		Manl PC	
t 1000		1000		PC amp	
y 1000		1000			
t W00UL,W00LL		W01UL		Chan ids	
y W00UL,W00LL		W01UL		Tracks	
				Chan ids	
				Tracks	
Group delay (usec)(sbd)	-9.51225173790E+02	Apriori delay (usec)	-9.51228465551E+02	Resid mbdelay (usec)	3.29176E-03 +/- 6.1E-04
Sband delay (usec)	-9.51226520051E+02	Apriori clock (usec)	-7.6993399E+00	Resid sbdelay (usec)	1.94550E-03 +/- 1.3E-03
Phase delay (usec)	-9.51228469421E+02	Apriori clockrate (us/s)	1.4440001E-07	Resid phdelay (usec)	-3.86958E-06 +/- 2.6E-07
Delay rate (us/s)	7.94743164419E-03	Apriori rate (us/s)	7.94757983264E-03	Resid rate (us/s)	-1.48188E-07 +/- 1.9E-09
Total phase (deg)	-128.1	Apriori accel (us/s/s)	-1.47400458741E-06	Resid phase (deg)	-120.0 +/- 8.2

ph/seg (deg)	RMS 79.3	Theor. 58.8	Amplitude Search (2048X8)	0.334 +/- 0.041	Pcal mode: MANUAL, MANUAL	PC period (AP's) 5, 5	sb window (us)	-1.000	1.000
amp/seg (%)	171.6	102.6	Interp.	0.000	Pcal rate: 0.000E+00, 0.000E+00 (us/s)	SampCntNorm: enabled	mb window (us)	-0.008	0.008
ph/frq (deg)	0.0	10.0	Inc. seg. avg.	0.518	Bits/sample: 2x2	Sample rate(MSamp/s): 64	dr window (ns/s)	-0.011	0.011
amp/frq (%)	34.6	17.5	Inc. frq. avg.	0.326	Data rate(Mb/s): 384	nlags: 128 t_cohere infinite	ion window (TEC)	0.00	0.00

t: az 6.9 el 51.3 pa -161.4 y: az 7.4 el 55.6 pa -162.8 u,v (fr/asec) -144.943 -513.312 simultaneous interpolator

Control file: cf_1234_gmva Input file: /Exps/c181c/v2_pc1/1234/No0140/ty..0D2XW9 Output file: /Exps/c181c/v2_pc1/1234/No0140/ty.W.13.0D2XW9