


Amp. and Phase vs. time for each freq., 74 segs, 8 APs / seg (4.10 sec / seg.), time ticks 5 sec

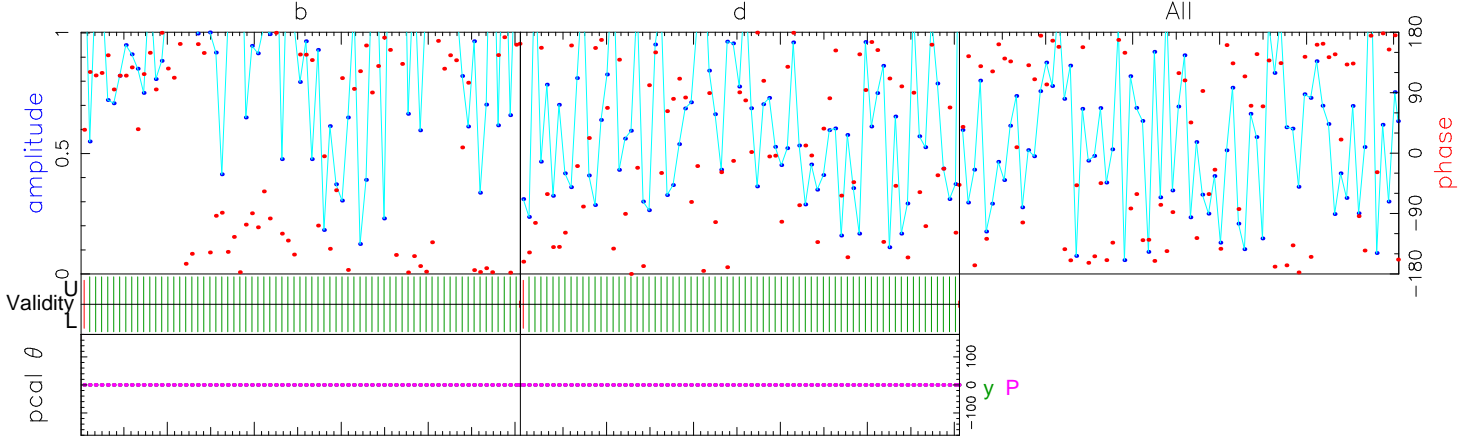

86156.00	86220.00	Freq (MHz)	All				
166.8	-153.2	Phase	169.9				
0.6	0.1	Ampl.	0.3				
129.1	240.5	Sbd box	129.4				
U/L 585/585	585/585	APs used					
y 0	0	PC freqs					
P 1000	1000	PC freqs					
y:P 0:0	0:0	PC phase					
y:P 0:0	0:0	ManI PC					
y 1000	1000	PC amp					
P 1000	1000						
y W01UL,W01LL	W03UL,W03LL	Chan ids					
P W01UL,W01LL	W03UL,W03LL	Tracks					
		Chan ids					
		Tracks					
Group delay (usec)(sbd)	8.05119762566E+03	Apriori delay (usec)	8.05119146910E+03	Resid mbdelay (usec)	-9.46844E-03	+/-	6.3E-04
Sband delay (usec)	8.05119423360E+03	Apriori clock (usec)	1.8943005E+01	Resid sbdelay (usec)	2.76450E-03	+/-	1.1E-03
Phase delay (usec)	8.05119147458E+03	Apriori clockrate (us/s)	2.7800001E-08	Resid phdelay (usec)	5.47765E-06	+/-	2.3E-07
Delay rate (us/s)	-1.01992506420E+00	Apriori rate (us/s)	-1.01992506219E+00	Resid rate (us/s)	-2.01372E-09	+/-	2.7E-09
Total phase (deg)	133.3	Apriori accel (us/s/s)	-4.20708898520E-05	Resid phase (deg)	79.9	+/-	7.3

ph/seg (deg)	RMS 71.2	Theor. 62.4	Amplitude Search (2048X8)	0.335 +/- 0.042	0.330	Pcal mode: MANUAL, MANUAL	PC period (AP's) 5, 5	sb window (us)	-1.000	1.000
amp/seg (%)	109.9	108.9	Interp.	0.000	0.000E+00	SampCntNorm: enabled		mb window (us)	-0.008	0.008
ph/frq (deg)	0.0	10.3	Inc. seg. avg.	0.352	64	Sample rate(MSamp/s):		dr window (ns/s)	-0.011	0.011
amp/frq (%)	82.8	17.9	Inc. frq. avg.	0.325	512	Data rate(Mb/s):		ion window (TEC)	0.00	0.00

y: az 324.2 el 59.2 pa 116.7 P: az 36.2 el 28.3 pa -65.2 u,v (fr/asec) 11116.178 -5452.860 simultaneous interpolator
 Control file: cf_1234_gmva Input file: /Exps/c182a/v1/1234/No0001/yP..017LCP Output file: /Exps/c182a/v1/1234/No0001/yP.W.79.017LCP