


Amp. and Phase vs. time for each freq., 69 segs, 8 APs / seg (4.10 sec / seg.), time ticks 5 sec

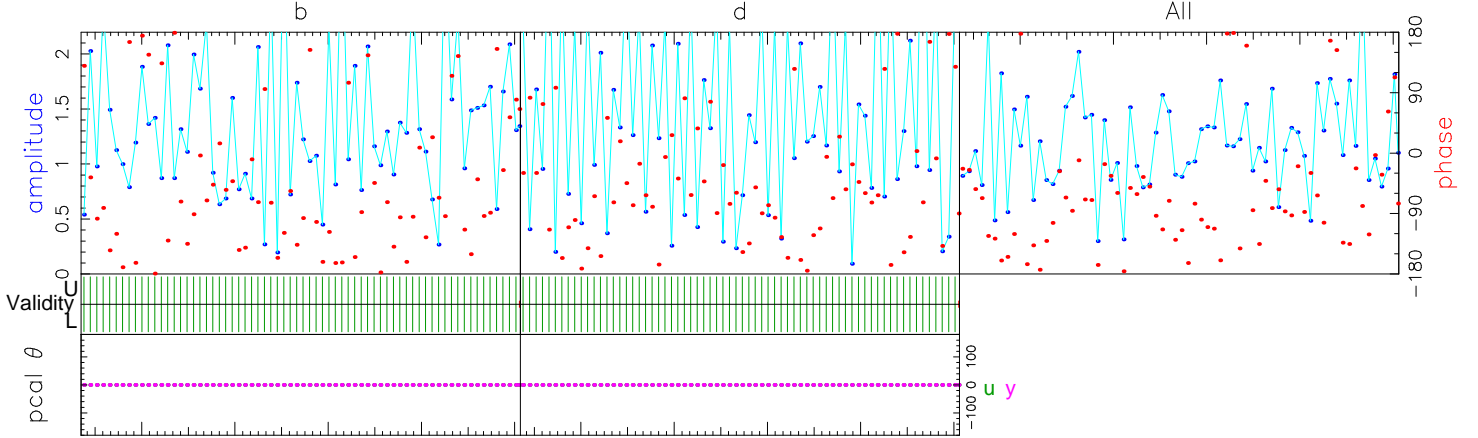

86156.00		86220.00		Freq (MHz)	All
-115.4		-84.4		Phase	-98.6
0.7		0.8		Ampl.	0.7
130.5		127.9		Sbd box	128.6
U/L 545/545		545/545		APs used	
u 0		0		PC freqs	
y 0		0		PC freqs	
u:y 0:0		0:0		PC phase	
u:y 0:0		0:0		Manl PC	
u 1000		1000		PC amp	
y 1000		1000			
u W01UL,W01LL		W03UL,W03LL		Chan ids	
y W01UL,W01LL		W03UL,W03LL		Tracks	
				Chan ids	
				Tracks	
Group delay (usec)(sbd)	1.74399961078E+02	Apriori delay (usec)	1.74407940355E+02	Resid mbdelay (usec)	-7.97928E-03 +/- 3.0E-04
Sband delay (usec)	1.74405001355E+02	Apriori clock (usec)	-3.9070255E+01	Resid sbdelay (usec)	-2.93900E-03 +/- 5.2E-04
Phase delay (usec)	1.74407937175E+02	Apriori clockrate (us/s)	-2.8550000E-07	Resid phdelay (usec)	-3.17973E-06 +/- 1.1E-07
Delay rate (us/s)	3.58631050512E-03	Apriori rate (us/s)	3.58759983341E-03	Resid rate (us/s)	-1.28933E-06 +/- 1.4E-09
Total phase (deg)	255.0	Apriori accel (us/s/s)	-3.25380832256E-06	Resid phase (deg)	-98.6 +/- 3.4

ph/seg (deg)	59.3	Theor.	28.6	Amplitude	0.733 +/- 0.044	Pcal mode:	MANUAL, MANUAL	PC period (AP's)	5, 5	
amp/seg (%)	90.1		49.9	Search (2048X8)	0.703	Pcal rate:	0.000E+00, 0.000E+00 (us/s)	sb window (us)	-1.000 1.000	
ph/frq (deg)	0.0		4.9	Interp.	0.000	Bits/sample:	2x2	SampCntNorm: enabled	mb window (us)	-0.008 0.008
amp/frq (%)	8.2		8.5	Inc. seg. avg.	1.080	Sample rate(MSamp/s):	64	dr window (ns/s)	-0.011 0.011	
				Inc. frq. avg.	0.722	Data rate(Mb/s):	512	nlags: 128 t_cohere infinite	ion window (TEC)	0.00 0.00

u: az 63.2 el 42.8 pa -76.5 y: az 64.3 el 42.0 pa -73.0 u,v (fr/asec) -30.385 -414.081 simultaneous interpolator

Control file: cf_1234_gmva Input file: /Exps/c182a/v1/1234/No0118/uy..017MKW Output file: /Exps/c182a/v1/1234/No0118/uy.W.125.017MKW