


Amp. and Phase vs. time for each freq., 23 segs, 24 APs / seg (12.29 sec / seg.), time ticks 10 sec

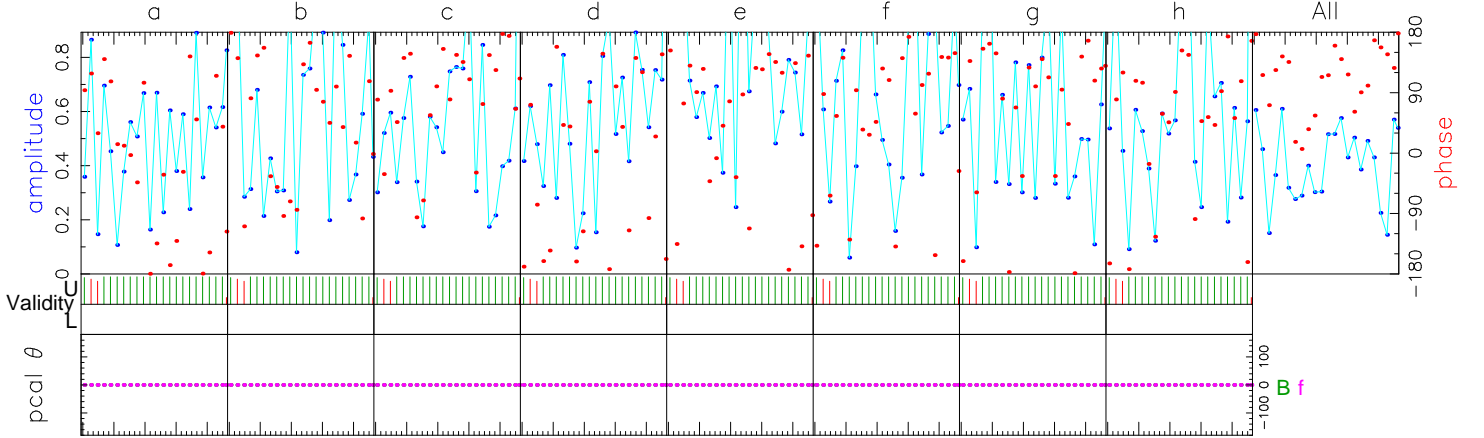

	86124.00	86156.00	86188.00	86220.00	86252.00	86284.00	86316.00	86348.00	Freq (MHz)	All	
U/L	530/0	530/0	530/0	530/0	530/0	530/0	530/0	530/0			
B	1000	1000	1000	1000	1000	1000	1000	1000	APs used		
f	1000	1000	1000	1000	1000	1000	1000	1000	PC freqs		
B:f	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	PC phase		
B:f	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	Manl PC		
B	1000	1000	1000	1000	1000	1000	1000	1000	PC amp		
f	1000	1000	1000	1000	1000	1000	1000	1000			
B	W00UL	W01UL	W02UL	W03UL	W04UL	W05UL	W06UL	W07UL	Chan ids		
f	W00UR	W01UR	W02UR	W03UR	W04UR	W05UR	W06UR	W07UR	Tracks		
Group delay (usec)(sbd)	-1.19030463573E+04			Apriori delay (usec)	-1.19030455027E+04			Resid mbdelay (usec)	-8.54598E-04	+/- 2.3E-04	
Sband delay (usec)	-1.19030309617E+04			Apriori clock (usec)	2.1011692E+01			Resid sbdelay (usec)	1.45410E-02	+/- 1.8E-03	
Phase delay (usec)	-1.19030454989E+04			Apriori clockrate (us/s)	-6.4690001E-07			Resid phdelay (usec)	3.83245E-06	+/- 3.9E-07	
Delay rate (us/s)	-1.56387015217E+00			Apriori rate (us/s)	-1.56387012086E+00			Resid rate (us/s)	-3.13005E-08	+/- 2.5E-09	
Total phase (deg)		-99.1		Apriori accel (us/s/s)	7.16860185708E-05			Resid phase (deg)	118.8	+/- 12.1	
RMS	48.8	28.9		Amplitude	0.298 +/- 0.031			Pcal mode: MANUAL, MANUAL	PC period (AP's)	5, 5	
ph/seg (deg)	48.8	28.9		Search (2048X32)	0.295			Pcal rate: 0.000E+00, 0.000E+00 (us/s)	sb window (us)	-1.000 1.000	
amp/seg (%)	58.3	50.5		Interp.	0.000			Bits/sample: 2x2	SampCntNorm: enabled	mb window (us)	-0.016 0.016
ph/frq (deg)	11.9	17.1		Inc. seg. avg.	0.360			Sample rate(MSamp/s): 64	dr window (ns/s)	-0.011 0.011	
amp/frq (%)	37.6	29.9		Inc. frq. avg.	0.289			Data rate(Mb/s): 1024	ion window (TEC)	0.00 0.00	
								nlags: 128 t_cohere infinite			