


Amp. and Phase vs. time for each freq., 68 segs, 9 APs / seg (4.61 sec / seg.), time ticks 5 sec

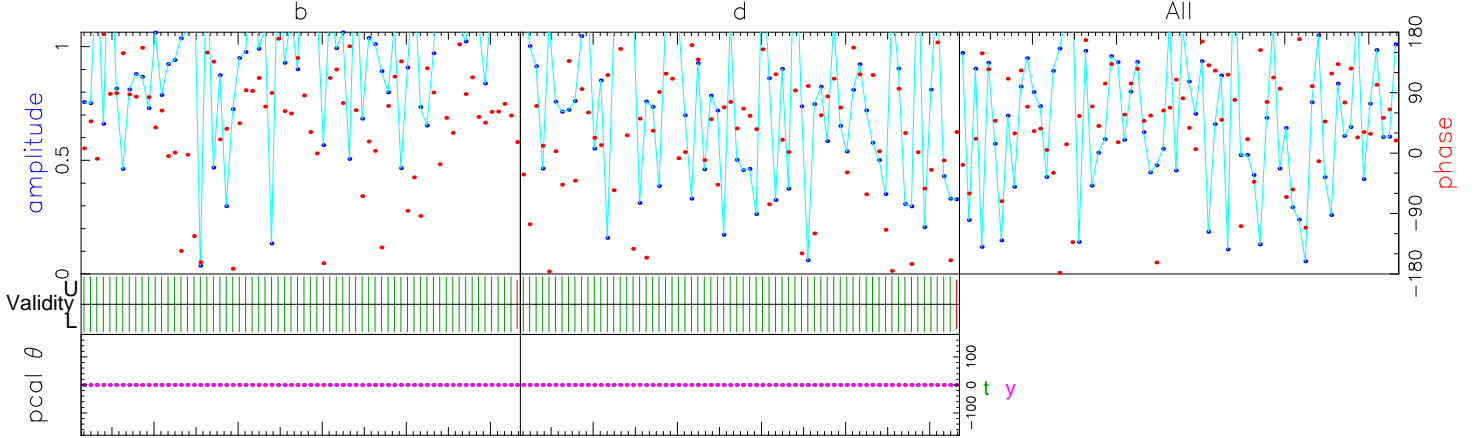

86156.00		86220.00		Freq (MHz)		All
69.5		67.6		Phase		69.0
0.5		0.2		Ampl.		0.3
129.1		122.9		Sbd box		129.1
U/L 611/611		611/611		APs used		
t 0		0		PC freqs		
y 0		0		PC freqs		
ty 0:0		0:0		PC phase		
ty 0:0		0:0		Manl PC		
t 1000		1000		PC amp		
y 1000		1000				
t W01UL,W01LL		W03UL,W03LL		Chan ids		
y W01UL,W01LL		W03UL,W03LL		Tracks		
				Chan ids		
				Tracks		
Group delay (usec)(sbd)	-9.42650248919E+02	Apriori delay (usec)	-9.42652719910E+02	Resid mbdelay (usec)	2.47099E-03	+/- 5.9E-04
Sband delay (usec)	-9.42651989410E+02	Apriori clock (usec)	-6.1344242E+00	Resid sbdelay (usec)	7.30500E-04	+/- 1.0E-03
Phase delay (usec)	-9.42652717686E+02	Apriori clockrate (us/s)	7.8899994E-08	Resid phdelay (usec)	2.22474E-06	+/- 2.2E-07
Delay rate (us/s)	6.54503551371E-03	Apriori rate (us/s)	6.54724343027E-03	Resid rate (us/s)	-2.20792E-06	+/- 2.4E-09
Total phase (deg)	-36.5	Apriori accel (us/s/s)	-1.51093535832E-06	Resid phase (deg)	69.0	+/- 6.8

ph/seg (deg)	RMS 71.2	Theor. 56.0	Amplitude 0.355 +/- 0.042	Pcal mode: MANUAL, MANUAL	PC period (AP's) 5, 5
amp/seg (%)	129.2	97.7	Search (2048X8) 0.333	Pcal rate: 0.000E+00, 0.000E+00 (us/s)	sb window (us) -1.000 1.000
ph/frq (deg)	0.0	9.6	Interp. 0.000	Bits/sample: 2x2	SampCntNorm: enabled
amp/frq (%)	43.9	16.7	Inc. seg. avg. 0.461	Sample rate(MSamp/s): 64	mb window (us) -0.008 0.008
			Inc. frq. avg. 0.349	Data rate(Mb/s): 512	dr window (ns/s) -0.011 0.011
				nlags: 128	t_cohere infinite
					ion window (TEC) 0.00 0.00
t: az 5.1 el 51.6 pa -166.2		y: az 5.4 el 55.9 pa -167.9	u,v (fr/asec) -121.771 -521.382		simultaneous interpolator
Control file: cf_1234_gmva		Input file: /Exps/c182b/v1/1234/No0205/ty..016GRH		Output file: /Exps/c182b/v1/1234/No0205/ty.W.10.016GRH	