


Amp. and Phase vs. time for each freq., 68 segs, 9 APs / seg (4.61 sec / seg.), time ticks 5 sec

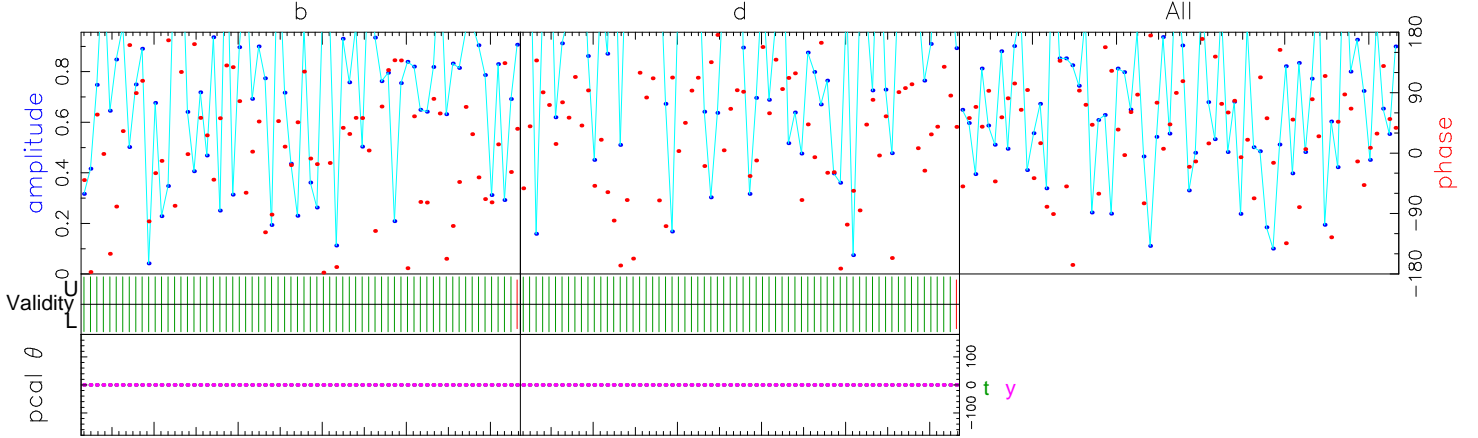

86156.00	86220.00	Freq (MHz)	All				
30.5	61.9	Phase	50.7				
0.2	0.4	Ampl.	0.3				
128.2	121.3	Sbd box	121.6				
U/L 611/611	611/611	APs used					
t 0	0	PC freqs					
y 0	0	PC freqs					
t:y 0:0	0:0	PC phase					
ty 0:0	0:0	Manl PC					
t 1000	1000	PC amp					
y 1000	1000						
t W01UL,W01LL	W03UL,W03LL	Chan ids					
y W01UR,W01LR	W03UR,W03LR	Tracks					
		Chan ids					
		Tracks					
Group delay (usec)(sbd)	-9.42704864196E+02	Apriori delay (usec)	-9.42652719910E+02	Resid mbdelay (usec)	-5.26929E-03	+/-	6.6E-04
Sband delay (usec)	-9.42710765410E+02	Apriori clock (usec)	-6.1344242E+00	Resid sbdelay (usec)	-5.80455E-02	+/-	1.1E-03
Phase delay (usec)	-9.42652718275E+02	Apriori clockrate (us/s)	7.8899994E-08	Resid phdelay (usec)	1.63588E-06	+/-	2.4E-07
Delay rate (us/s)	6.54502778901E-03	Apriori rate (us/s)	6.54724343027E-03	Resid rate (us/s)	-2.21564E-06	+/-	2.7E-09
Total phase (deg)	215.2	Apriori accel (us/s/s)	-1.51093535832E-06	Resid phase (deg)	320.7	+/-	7.6

ph/seg (deg)	RMS 73.5	Theor. 62.3	Amplitude 0.319 +/- 0.042	Pcal mode: MANUAL, MANUAL	PC period (AP's) 5, 5	
amp/seg (%)	147.2	108.7	Search (2048X8) 0.300	Pcal rate: 0.000E+00, 0.000E+00 (us/s)	sb window (us) -1.000 1.000	
ph/frq (deg)	0.0	10.7	Interp. 0.000	Bits/sample: 2x2	SampCntNorm: enabled	mb window (us) -0.008 0.008
amp/frq (%)	27.7	18.6	Inc. seg. avg. 0.429	Sample rate(MSamp/s): 64	dr window (ns/s) -0.011 0.011	
			Inc. frq. avg. 0.304	Data rate(Mb/s): 512	ion window (TEC) 0.00 0.00	
				nlags: 128	t_cohere infinite	

t: az 5.1 el 51.6 pa -166.2 y: az 5.4 el 55.9 pa -167.9 u,v (fr/asec) -121.771 -521.382 simultaneous interpolator

Control file: cf_1234_gmva Input file: /Exps/c182b/v1/1234/No0205/ty..016GRH Output file: /Exps/c182b/v1/1234/No0205/ty.W.36.016GRH