


Amp. and Phase vs. time for each freq., 69 segs, 9 APs / seg (4.61 sec / seg.), time ticks 5 sec

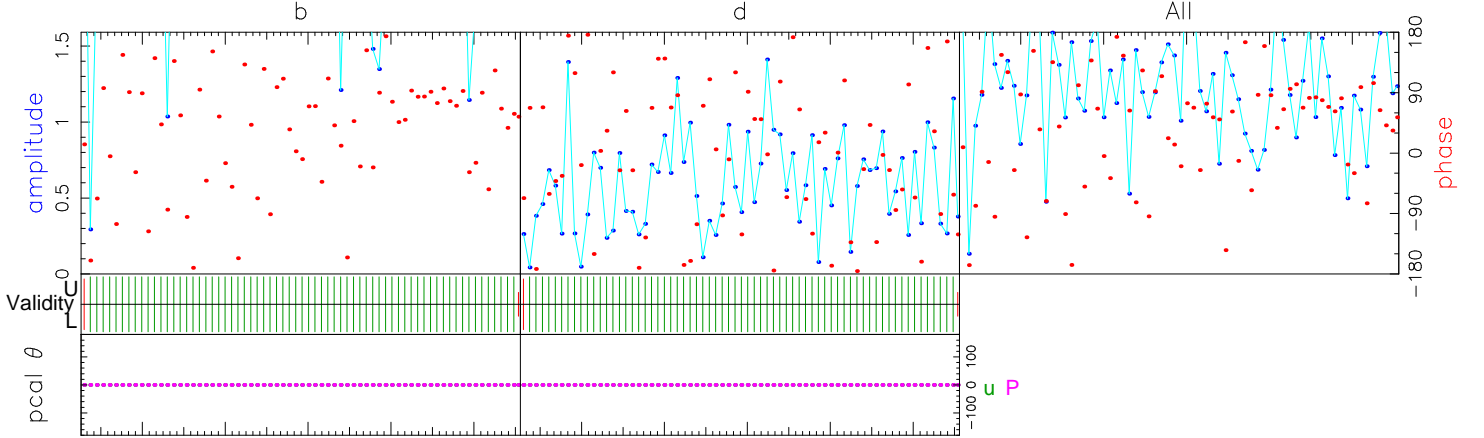

86156.00		86220.00		Freq (MHz)	All
65.2		44.8		Phase	64.9
1.0		0.0		Ampl.	0.5
126.1		123.9		Sbd box	125.5
U/L 616/616		616/616		APs used	
u 0		0		PC freqs	
P 1000		1000		PC freqs	
u:P 0:0		0:0		PC phase	
u:P 0:0		0:0		Manl PC	
P u 1000		1000		PC amp	
P 1000		1000			
u W01UL,W01LL		W03UL,W03LL		Chan ids	
P W01UL,W01LL		W03UL,W03LL		Tracks	
				Chan ids	
				Tracks	
Group delay (usec)(sbd)	1.28204630022E+03	Apriori delay (usec)	1.28207165494E+03	Resid mbdelay (usec)	5.89528E-03 +/- 3.9E-04
Sband delay (usec)	1.28204451744E+03	Apriori clock (usec)	-2.0117237E+01	Resid sbdelay (usec)	-2.71375E-02 +/- 6.7E-04
Phase delay (usec)	1.28207165703E+03	Apriori clockrate (us/s)	6.7300000E-08	Resid phdelay (usec)	2.09238E-06 +/- 1.4E-07
Delay rate (us/s)	-1.80066039408E+00	Apriori rate (us/s)	-1.80066079720E+00	Resid rate (us/s)	4.03123E-07 +/- 1.6E-09
Total phase (deg)	13.3	Apriori accel (us/s/s)	-8.43118242101E-06	Resid phase (deg)	244.9 +/- 4.5

ph/seg (deg)	78.7	Theor.	37.1	Amplitude	0.530 +/- 0.041	Pcal mode:	MANUAL, MANUAL	PC period (AP's)	5, 5	
amp/seg (%)	150.7	Search (2048X8)	0.512	Search	0.000	Pcal rate:	0.000E+00, 0.000E+00 (us/s)	sb window (us)	-1.000 1.000	
ph/frq (deg)	0.0	Interp.	0.000	Inc. seg. avg.	1.022	Bits/sample:	2x2	SampCntNorm: enabled	mb window (us)	-0.008 0.008
amp/frq (%)	94.6	Inc. frq. avg.	0.517	Inc. frq. avg.	0.517	Sample rate(MSamp/s):	64	dr window (ns/s)	-0.011 0.011	
u: az 292.4 el 41.3 pa 72.6		P: az 65.7 el 35.4 pa -68.0		u,v (fr/asec)	13088.191 -831.795	Data rate(Mb/s):	512	ion window (TEC)	0.00 0.00	
Control file: cf_1234_gmva		Input file: /Exps/c182c/v1/1234/No0019/uP..0IGQFF				nlags:	128	t_cohere	infinite	simultaneous interpolator
		Output file: /Exps/c182c/v1/1234/No0019/uP.W.62.0IGQFF								