



Fringe quality 9  
 Error code H  
 SNR 79219.5  
 Int time 9.998  
 Amp 9161.565  
 Phase -9.4  
 PFD 0.0e+00  
 Delays (us)  
 SBD -0.006921  
 MBD 0.000000  
 Fringe rate (Hz)  
 0.000086  
 Ion TEC 0.000  
 Ref freq (MHz)  
 86044.0000  
 AP (sec) 0.500  
 Exp. e17a10  
 Exper # 3600  
 Yr:day 2020:052  
 Start 110549.00  
 Stop 110559.00  
 FRT 110554.00  
 Corr/FF/build  
 2020:052:155201  
 2020:052:193813  
 2020:014:135814  
 RA & Dec (J2000)  
 10h58m29.605207s  
 +01°33'58.823589"

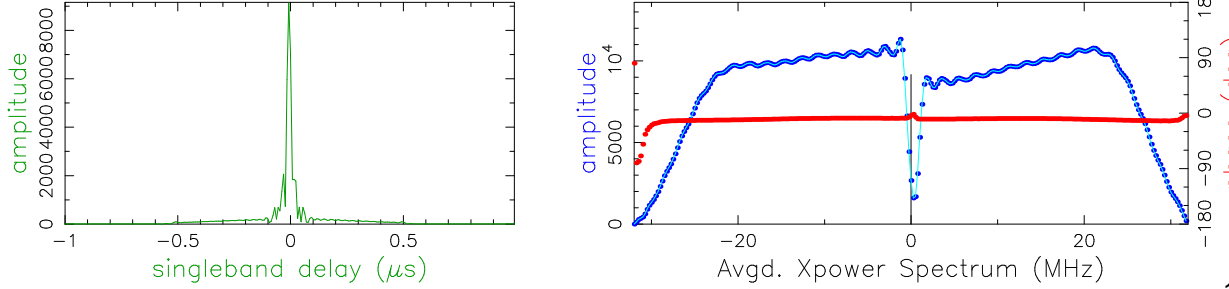

Amp. and Phase vs. time for each freq., 20 segs, 1 APs / seg (0.50 sec / seg.), time ticks 1 sec

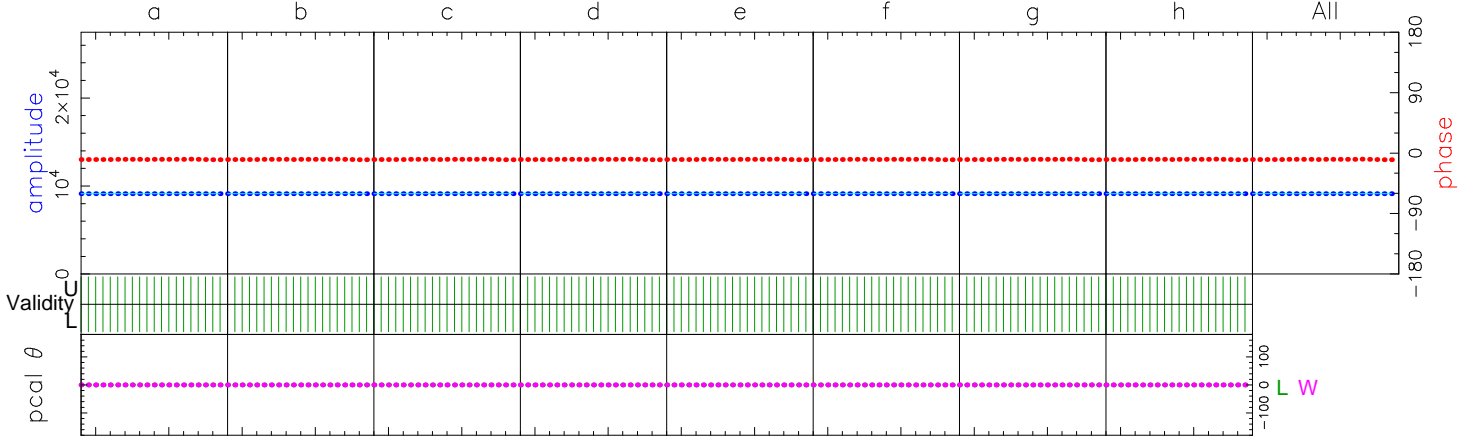

	86044.00	86108.00	86172.00	86236.00	86300.00	86364.00	86428.00	86492.00	Freq (MHz)	All
	-9.4	-9.4	-9.4	-9.4	-9.4	-9.4	-9.4	-9.4	Phase	-9.4
	9124.7	9124.7	9124.7	9124.7	9124.7	9124.7	9124.7	9124.7	Ampl.	9124.7
	128.1	128.1	128.1	128.1	128.1	128.1	128.1	128.1	Sbd box	128.1
U/L	20/20	20/20	20/20	20/20	20/20	20/20	20/20	20/20	APs used	
L	-inf	-inf	-inf	-inf	-inf	-inf	-inf	-inf	PC L delays (ns)	
W	-inf	-inf	-inf	-inf	-inf	-inf	-inf	-inf	PC L delays (ns)	
L:W	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	PC phase	
L:W	0:0	0:0	0:0	0:0	0:0	0:0	0:0	0:0	Manl PC	
L	0	0	0	0	0	0	0	0	PC amp	
W	0	0	0	0	0	0	0	0		
L	W00UL,W00LL	W01UL,W01LL	W02UL,W02LL	W03UL,W03LL	W04UL,W04LL	W05UL,W05LL	W06UL,W06LL	W07UL,W07LL	Chan ids	
									Tracks	
W	W00UL,W00LL	W01UL,W01LL	W02UL,W02LL	W03UL,W03LL	W04UL,W04LL	W05UL,W05LL	W06UL,W06LL	W07UL,W07LL	Chan ids	
									Tracks	
Group delay (usec)(model)	0.0000000000E+00		Apriori delay (usec)		0.0000000000E+00		Resid mbdelay (usec)		0.00000E+00 +/- 1.4E-08	
Sband delay (usec)	-6.9215000000E-03		Apriori clock (usec)		0.0000000E+00		Resid sbdelay (usec)		-6.92150E-03 +/- 1.1E-07	
Phase delay (usec)	-3.05015743428E-07		Apriori clockrate (us/s)		0.0000000E+00		Resid phdelay (usec)		-3.05016E-07 +/- 2.3E-11	
Delay rate (us/s)	9.99488633722E-10		Apriori rate (us/s)		0.0000000000E+00		Resid rate (us/s)		9.99489E-10 +/- 8.1E-12	
Total phase (deg)			Apriori accel (us/s/s)		0.0000000000E+00		Resid phase (deg)		-9.4 +/- 0.0	

RMS Theor. Amplitude 9161.564 +/- 0.116 Pcal mode: MULTITONE, MULTITONE PC period (AP's) 5, 5  
 ph/seg (deg) 0.2 0.0 Search (64X32) 9124.729 Pcal rate: 0.000E+00, 0.000E+00 (us/s) sb window (us) -1.000 1.000  
 amp/seg (%) 0.4 0.0 Interp. 0.000 Bits/sample: 2x2 SampCntNorm: disabled mb window (us) -0.008 0.008  
 ph/frq (deg) 0.0 0.0 Inc. seg. avg. 9124.790 Sample rate(MSamp/s): 64 Data rate(Mb/s): 2048 nlags: 128 t\_cohere infinite dr window (ns/s) -0.010 0.010  
 amp/frq (%) 0.4 0.0 Inc. frq. avg. 9124.739 Data rate(Mb/s): 2048 nlags: 128 t\_cohere infinite ion window (TEC) 0.00 0.00  
 L: az 273.6 el 4.8 pa 113.2 W: az 273.6 el 4.8 pa 113.2 u,v (fr/asec) 0.000 0.000 simultaneous interpolator  
 Control file: default Input file: /Exps/TESTS/DBBC3\_DDC\_2020\_02\_21/2222/No0001/LW..11AL08 Output file: Suppressed by test mode